

MIAMI-DADE COUNTY PRODUCT CONTROL SECTION

11805 SW 26 Street, Room 208 Miami, Florida 33175-2474 T (786) 315-2590 F (786) 315-2599

www.miamidade.gov/economy

DEPARTMENT OF REGULATORY AND ECONOMIC RESOURCES (RER) BOARD AND CODE ADMINISTRATION DIVISION

Gulf Coast Supply & Manufacturing LLC. 14429 SW 2nd Place, Suite G30 Newberry, FL. 32669

NOTICE OF ACCEPTANCE (NOA)

SCOPE:

This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed and accepted by Miami-Dade County RER - Product Control Section to be used in Miami Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Section (In Miami Dade County) and/or the AHJ (in areas other than Miami Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. RER reserves the right to revoke this acceptance, if it is determined by Miami-Dade County Product Control Section that this product or material fails to meet the requirements of the applicable building code.

This product is approved as described herein, and has been designed to comply with the Florida Building Code including the High Velocity Hurricane Zone of the Florida Building Code.

DESCRIPTION: Versaloc 1.5 Aluminum Panel over Plywood deck

LABELING: Each unit shall bear a permanent label with the manufacturer's name or logo, city, state and following statement: "Miami-Dade County Product Control Approved", unless otherwise noted herein.

RENEWAL of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

TERMINATION of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.

ADVERTISEMENT: The NOA number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

INSPECTION: A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

This NOA renews NOA #19-0529.01 and consists of pages 1 through 5. The submitted documentation was reviewed by Alex Tigera.

09/05/24

MIAMI-DADE COUNTY
APPROVED

NOA No.: 24-0313.04 Expiration Date: 06/05/25 Approval Date: 09/05/24

Page 1 of 5

ROOFING SYSTEM APPROVAL:

Category: Roofing

Sub-Category: Metal, Panels (Non-Structural)

Material:AluminumDeck Type:WoodMaximum Design Pressure-159.25 psf

TRADE NAMES OF PRODUCTS MANUFACTURED OR LABELED BY APPLICANT:

Product	Dimensions	Test Specifications	Product <u>Description</u>
Versaloc 1.5 Aluminum Panel	Length: various Height: 1 1/2" Width: 12" - 20" (coverage) Thickness: .032" Aluminum 3105 H14	TAS 110	Aluminum, preformed, standing seam, coated panels.
Versaloc Clip	Length: 3" Height: 1-1/2" Width: 1" Thickness 24 ga		Corrosion resistant, 24 gauge steel clip.

EVIDENCE SUBMITTED:

Test Agency	Test Identifier	Test Name/Report	Date
Valspar	Lab Form	ASTM B 117	
Valspar	Lab Form	ASTM G 23	
PRI Construction Materials Technologies	HTL-018-02-01	TAS 100	05/29/09
Hurricane Test Laboratory, Inc.	0527-0210-09	TAS 125	07/01/09



NOA No.: 24-0313.04 Expiration Date: 06/05/25 Approval Date: 09/05/24

Page 2 of 5

APPROVED ASSEMBLIES:

System: Versaloc 1.5 Aluminum Panel 12" - 20" wide

Deck Type: Wood, Non-insulated

Deck Description: New Construction $^{19}/_{32}$ " or greater plywood or wood plank, or for re-roofing $^{15}/_{32}$ " or greater

plywood.

Slope Range: 2": 12" or greater

Maximum Uplift See Table A below

Pressure:

Deck Attachment: In accordance with applicable Building Code, but in no case shall it be less than 8d annular

ring shank nails spaced 6" o.c. In reroofing, where the deck is less than ¹⁹/₃₂" thick

(Minimum $^{15}/_{32}$ ") The above attachment method must be in addition to existing attachment.

Underlayment: Minimum underlayment shall be an ASTM D 226 Type II installed with a minimum 4"

side-lap and 6" end-laps. Underlayment shall be fastened with corrosion resistant tin-caps and 12 gauge 1 ¼" annular ring-shank nails, spaced 6" o.c. at all laps and two staggered rows 12" o.c. in the field of the roll or any approved underlayment having a current NOA.

Fire Barrier Board: Any approved fire barrier having a current NOA. Refer to a current fire directory listing for

fire ratings of this roofing system assembly as well as the location of the fire barrier within

the assembly. See Limitation # 1.

Valleys: Valley construction shall be in compliance with Roofing Application Standard RAS 133

and with the current published installation instructions and details in Gulf Coast Supply

Rollformer Association's Installation Manual.

Metal Panels and Accessories:

Install the "Versaloc 1.5 Aluminum Panel" including flashing penetrations, valleys, end laps

and accessories in compliance Gulf Coast Supply Rollformer Association's current, published installation instructions and in compliance with the minimum requirements

detailed in Roofing Application Standard RAS 133.

Panels shall be secured along the male rib with approved clips and two corrosion resistant #10 pancake head fasteners of sufficient length to penetrate through the sheathing a

minimum of $^{3}/_{16}$ ". The panel clips were placed at a spacing listed in Table A below starting 3" from panel end. The female rib of panel is installed over the male rib of panel. A bead of Bostik Chemcaulk is placed between the seams for 90° seam only. Panels are seamed as

listed below in Table A.

TABLE A MAXIMUM DESIGN PRESSURES					
Roof Areas	Field	Perimeter and Corner ¹			
Maximum Design Pressures	118 psf	159.25 psf			
Maximum Clip Spacing	16" o.c.	8" o.c.			
Panel Seam	90° degrees	180° degrees			
Extrapolation shall not be allowed					



NOA No.: 24-0313.04 Expiration Date: 06/05/25 Approval Date: 09/05/24

Page 3 of 5

LIMITATIONS

- 1. Fire classification is not part of this acceptance; refer to a current Approved Roofing Materials Directory for fire ratings of this product.
- 2. The maximum designed pressure listed herein shall be applicable to all roof pressure zones (i.e. field, perimeters, and corners). Neither rational analysis, nor extrapolation shall be permitted for enhanced fastening at enhanced pressure zones (i.e. perimeters, extended corners and corners).
- **3.** Panels may be rolls formed in continuous lengths from eave to ridge. Maximum lengths shall be as described in Roofing Application Standard RAS 133.
- 4. All panels shall be permanently labeled with the manufacturer's name and/or logo, and the following statement: "Miami-Dade County Product Control Approved" or with the Miami-Dade County Product Control Seal as seen below. All clips shall be permanently labeled with the manufacturer's name and/or logo, and/or model.




- 5. All products listed herein shall have a quality assurance audit in accordance with the Florida Building Code and Rule 61G20-3 of the Florida Administrative Code.
- 6. Panels may be jobsite roll formed with machine model S#8510804, S#10220207, S#2050711, S#2751012, S#9291105, S#3270414 from Gulf Coast Supply Rollformer Association.



NOA No.: 24-0313.04 Expiration Date: 06/05/25 Approval Date: 09/05/24

Page 4 of 5

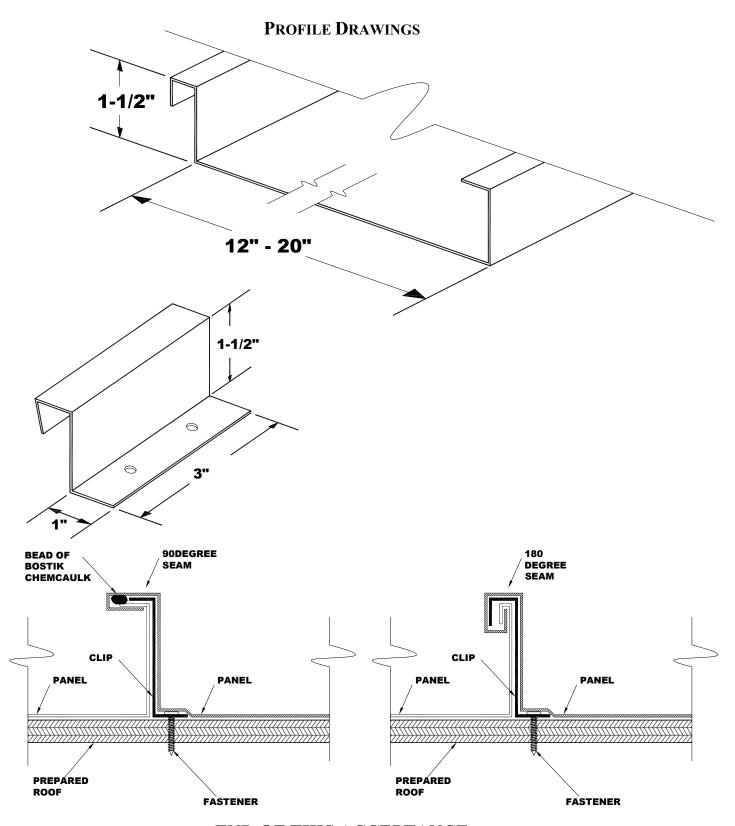

END OF THIS ACCEPTANCE



NOA No.: 24-0313.04 Expiration Date: 06/05/25 Approval Date: 09/05/24

Page 5 of 5