THE TRUSTED NAME IN METAL ROOFING



PRODUCT CATALOG



YOUR SUCCESS IS OUR SUCCESS.

As the Southeast's trusted choice for metal roofing for almost 30 years, Gulf Coast Supply & Manufacturing safely provides the best value in metal roofing through product availability, fast and reliable service, and industry expertise. We offer start-to-finish metal roofing solutions.



With over 45+ color options and 9 profiles to choose from, Gulf Coast Supply & Manufacturing offers complete metal roofing solutions. While metal roofing is crucial, it is only part of what Gulf Coast Supply offers. Gulf Coast Supply prides itself on offering start-to-finish solutions for our customers.

Gulf Coast Supply provides services such as the ProofMyRoof™ visualizer and QuickQuote™ quoting service to provide quality estimating and sales tools to your team. Expert sales staff and industry-leading turnaround times help ensure that your project is completed correctly and on-time. Gulf Coast Supply's Contractor's Advantage™ offers a comprehensive education program for executive teams as well as hands-on training for installers.

From first call to project closeout, Gulf Coast offers everything you need.



General Ruilding Components







TABLE OF CONTENTS


Trime


deficial ballating components		111113	
Panels	3	Ridge Caps	11
Soffit	4	Eave Trims	12
Skypanels	5	Gable Trims	13
Insulation and underlayment	5	Wall Flashings	14
Accessories		Transitions and Valleys	15
Screws	6	Corner Trims	16
Clips	7	Panel Capping Trims	17
Tools and Purlins	Purlins 8 Building Trims		18
Closures	9	Other Trims	19
Boots, Paint, Sealants	10	Custom Trim Order Form	20
		Order Form	21


GULF COAST PANEL PROFILES












GulfWave™ Exposed fastener

XXXCO24 XXXCO26(K)




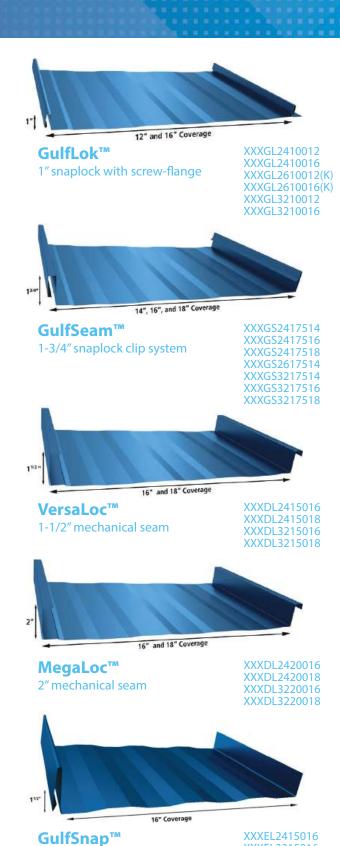

XXXEL3215016

SOFFIT


SOJ Soffit J-Channel



XXSOJ24 XXXSOJ32


SFR

Soffit Fascia for Flush Fascia




XXXSFR24 XXXSFR32

SFFSoffit Fascia for Revealed Fascia



Soffit

Soffit Fascia for Revealed Fascia 10' Length Max

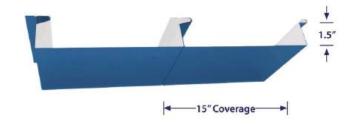

PAISO2415 PAISO3215

SKYPANELS



- » 12' long x 1 mm or 1.5 mm
- » Additional lengths and thicknesses can be ordered



Matches GulfRib™ panel *STOCKED*

SSWTR1012 matches white GulfRib™ SSCTR1012 matches clear GulfRib™



Matches GulfPBR™ panel *STOCKED*

SSWPB1012 matches white GulfPBR™ SSCPB1012 matches clear GulfPBR™ SPECIAL ORDER

SSWPB1512 1:5mm thick matches white GulfPBR™

INSULATION AND UNDERLAYMENT



TYVEK160

Tyvek Protec 160 Synthetic Nailable Underlayment

10 sq. roll, 40 yr. limited warranties 4' x 250' 36/Pallet



TITNAIL

Grip-Rite® Button Cap Roofing Nails 1" Roof Nails

3000/tub Sold by the bucket



GCSPSU

GulfShield™ HT Peel-and-Stick Underlayment

2 sq. rolls, 36' x 67', 45 mil 25/pallet



INTAW3X165

Insulation Seam Tape

3" wide x 165' long Silver 16/case



TITPSU Modified Rubberized asphalt Peel & Stick underlayment

Titanium PSU30

2 sq. roll, 36" X 72' ROLLS 25 ROLLS/PALLET



FELT30

#30 Felt

ASTM D226 2 sq. roll, 3' x 72'



DBWF Double-bubble foil white on one side;

reflective on other side poly. 4' x 125'

Reflective Foil Insulation

500/sq. ft. rolls

SCREWS

UltiMate #10-14 Long-Life Ultimate Fasteners

- » Ideal for 5V roof applications
- Washer protects and seals under the head
- 5/16" Head & Type-17 Point
- Lifetime Warranty





Long Life #1/4-14x7/8" LapStitch Ultimate **Fasteners**

- » Ideal for metal toc metal applications
- 5/16" Hex Head & TCP1 Point Type
- Lifetime Warranty





Ultimate #12-14 Self Driller

- » Replacement fastener in metal to wood application
- 5/16" Hex Head & 26 Degree Sharp Point
- Zinc cast head for long life performance



PAISD1.25A 2000/case PAISD1.5A 1500/case

Ultimate Long Life WoodTite Fastener #12 - 2"

- » Replacement fastener in metal to wood application
- » EPDM Tubular Washer & Carbon Steel Shank
- 5/16" Hex Head & 26 Degree Sharp Point
- Zinc cast head for long life performance

PAIWXU - 1.5" 2000/case PAIWXU2 - 2" 1500/case

EnduraFast Fasteners #10-14 HWH DLP 410 SS

- Ideal for metal to ACQ (Alkaline Copper)
- 410 stainless steel with black e-coating
- 1/4" Hex Head & 26 Degree Sharp Point

1.5", 2000/case **PAIWE** PAIWE₁ 1", 2500/case PAIWE₂ 2", 1500/case PAIWE2.5 2.5", 1000/case

Pancake Self-Drilling Screws #12 - 1"

For attaching standing seam panels and clips to steel

PCSD 5000/case



5000/case

Pancake Type "A" for wood #12

#12 x 1", 1-1/2", or 2". Available in carbon and stainless steel

PCWGL - 1" PCWGL1.5 - 1.5"

5000/case PCWGLST - 1" Stainless Steel 5000/case

Pancake Type "A" for wood #10

10-12 X 1", 1½", 2", or 3". Available in carbon and stainless steel.

PCWCLIP - 1" 5000/case PCWLIP1.5 - 1.5" 2500/case PCWCLIP2 - 2" 2000/case PCWCLIP3 - 3" 2000/case PCWCLIPST - 1" Stainless Steel 5000/case PCWCLIP2ST - 2" Stainless Steel 5000/case

#1/4-14 x 7/8" Flat Top Lap Self-**Drilling Fasteners**

- Ideal for metal to metal applications
- 5/16" Hex Head and TCP Self Drillina Point
- Carbon Steel

PAILAPA 2500/case

Flat Top #12-14 x1" **Lap Screws**

(5/16" flattop head). Available In SMP and **PVDF Colors**

PAISD1A 2500/case



WoodTite - 1" #10-16 HWH HLX WoodTite Fastener

- » Ideal for multiple layers of metal panels
- Available in all colors
- Bonded washer provides positive sealing
- 1/4" Head & Type 17 point
- » Carbon steel with long-life coating

WT 1.5" 2500/case WT2 2" 2000/case WT2.5 2-1/2" 1000/case WT₃ 3" 1000/case



1/8" #43 Stainless Steel Rivets

Available in all colors. Use with steel panels and trim. 1/8" Rivet Diameter 100/Bag & 10 bags/case Sold by bag qty

PAISD1.25A - 1.25" 2000/case PAISD1.5A - 1.5" 1500/case

1/8" x 3/16" #43 Buttonhead **Aluminum Rivets**

Available in .032 colors.

- Use with aluminum panels and trim
- 1/8" Rivet Diameter
- 100/bag & 10 bags/] case
- Sold by bag gty

PAIALRIVET100 100/baa





SCREWS AND CLIPS



#10-16 x 1-1/2 IN 302 SS

- » Used where corrosive environments require stainless fasteners.
- » .0003 Mechanical Zinc plated / .0003 Electro-Cad Plated / .0005 Min Mechanical Zinc Plated for lubrication during installation.
- » Type-B & BP points have fluted threads designed for tapping heavy gauged steel.
- » Ductility for high-stress applications.
- » Made from 100% 304 stainless wire.
- » 304 Stainless Steel are Made in the USA.

PAISS1.5A 2500/case

21/2" & 3" Star Drive **Deck Screws**

- » 21/5"
- » Per screw or by the case.
- » Lifetime Warranty
- » Screw for both white and pressure treated wood.
- » Sold by the case.

DMIDSPGS-CSE 2000/CASE DMIDSPG3S-CSE 1500/CASE

Scamp Screws

- » Stainless cap, #12
- » 1-1/2" and 2"
- » Unpainted screws in stock. Type 17 cut point.
- » Lifetime Warranty screw

GLMSC 1.5" - 2500/case **GLMSC2** 2" - 1500/case



- » 5/16" Hex Head And Type-17 Sharp Point
- » Mechanically Plated With Long Life Coating
- 1" and 1-1/2" Available

PAIGOOFW1 2500/case PAIGOOFW1.5 2000/case



For 2" high MegaLoc™ Panels

CSFL205G 110/case CSFL210G 110/case* *Special order. For Open Framing



GulfSeam™ Clip

1-3/4" x 3-1/2" 18GA For fastenina GulfSeam[™] panels


GS175G 250/case Galvanized **GS175S** 250/case Stainless *Sold by case



GulfSnap™ Clip

1.5 snap seam For fastening GulfSnap[™] panels

GS150G 600/case



Mechanical Seam 2-Piece Butterfly Clip

For 2" MegaLoc™



MLBG18 - 18 GA Galvanized Base 150/case MLTG18 - 22 GA Galvanized Tab 150/case

CSSBS18 - Stainless Base CSST200S22 - Stainless Top

150/case 150/case

Sold by Case

#14 ID x 1 "OD **Galvanized dish**

With bonded neoprene washer. Used with Sky Panels



WASH₁

2000/case

Mechanical Seam 1-Piece Clip

24GA 1-1/2 X 3 Wide X 1 Base For 1.5" VersaLoc™ Panels



VL150G - Galvanized VL150S - Stainless Sold by Case

500/case 500/case

TOOLS AND WOOD PURLINS



TSHD

Malco® Turbo Sheer HD

- » Use with minimum 14.4V 3/8" Drill
- » Up To 18-Gauge (1.22 Mm) Cutting Capacity
- » Limited Lifetime Warranty






1412YP 12' lengths
Southern Yellow Pine #2
1"x4"x12'

Midwest Tool® Snips and Seaming Tools

Up to 18 GA Cutting Capability

MWT-Snip Right

MWT-Snip Left



MWT-Snip Straight

MWT-Snip Long



MWT-Seamer Set 3" Seamer And 6" Interchangeable Blades Included



MWT-5 Seamer - 5" Straight Aluminum Blades MWT-9 Seamer - 9" Straight Aluminum Blades

MWT-15 Seamer - 15" Straight Aluminum Blades

Seaming Tools

Provided by DMI Inc.




Rent or purchase at http://www.gulfcoastsupply.com/DI

CLOSURE SOLUTIONS



Profile Vent®

Our best venting solution comes in lengths of 50'.

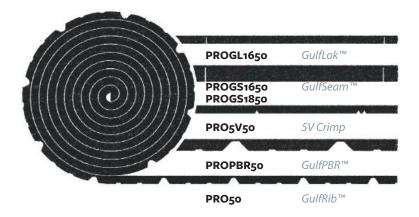

CLOSURES

Closures come in panel widths. Sold by the strip, 10 per strip, 10 strips per case

5V Crimp

ISC₅V-10 Outside OSC5V-10

GulfRib™

Inside ISC-10 Outside OSC-10

GulfPBR™

Inside ISCPBR-10 Outside OSCPBR-10

GulfWave™

OSCCOR Inside Outside ISCCOR

VENTED CLOSURES

Vented closures come in panel widths. Sold by the strip, 10 per strip, 10 strips per case 40 Year Limited Warranty

5V Crimp Vented VC5V



GulfPBR™ Vented VCPBR



Gooseneck Vents

White Aluminum and Galvalume available in 4", 6", and 10"

Peel and Seal®

» Aluminum back

» 33½′ x 6-inch roll

For sealing hips and ridges

» 10 year Limited Warranty

GNECK4 GNECK6 GNECK10

Flex-o-vent®

Flex-O-Vent is our most economical polyester-based ventilation product.



- » 1-1/2" x 3" x 20' roll, shrink-wrapped.
- » Available in 20' rolls and multiple packaging ontions
- Won't absorb moisture, which can freeze and block all ventilation
- 2 beads of M63 Marco proprietary adhesive for superior hold
- Easy, one-person installation
- » 40 year limited warranty
- » ASTM testing: D1929, D737

Net Free Area: FOV - 1" free-standing product, NFA 23 sq. in.*

1- 1/2" x 3" x 10': Rib heights up to 1-1/4" 1- 1/2" x 2" x 10': Rib heights up to 1-1/4" 1" x 3" x 10': Rib heights up to 3/4" 1" x 2" x 10': Rib heights up to 3/4" Air Permeability: >760 cubic feet per minute

Flex-o-vent® (Continued)

Cold Cracking: -55° C (-130° F) Tear Strength: 3.5 ppi

Tensile Strength: 16 psi – Elongation 175% Compressive Strength: 1.8 psi at 75%

*Effective Net Free Area varies based on product.

FOV 1-20' roll per pkg. Sold by roll

Expanding Foam

Expands to fill up voids. Recommended for sealing panels over valleys.



- » 5V Crimp, GulfWave™: expands from ¼" up to 1"
- GulfRib™, GulfPBR™: expands from 3/8 " up to 11/2"

XF120 12/case - 1" x 1" x 20' **XF5** 12/case - 1" x 1.5" x 15'



BOOTS, PAINTS, AND SEALANTS

Pipe Boots

Gray (#3 in 10 colors*) for temperatures up to 250° 20 Year Limited Warranty

<i>>>></i>	#3: ½" - 5"	PAIPB ₃ 15/case
<i>>>></i>	#5: 41/4" - 73/4"	PB ₅ 10/case
<i>>>></i>	#6: 5" - 9"	PB6 10/case
<i>>>></i>	#7: 6"- 11"	PB7 10/case
<i>>>></i>	#8: 7" - 13"	PB8 5/case
<i>>>></i>	#9: 9" - 19"	PB9 5/case

*Available in red, dark gray, light gray, brown, dark green, light blue, dark blue, white, tan, & black

PB3: BAR, CHA, LIG, COB, DAG, HAB, COS, POW, MOT, & BLA

Silicone Pipe Boots

» #3·1/2" - 5"

Gray, hi-temp (up to 450° 20 Year Limited Warranty)

PRSII 2

PDSILS	$\pi J. /2 - J$	//
	15/case	
PBSIL ₅	#5: 4½" - 7¾"	>>
	10/case	
PBSIL6	#6: 5" - 9"	<i>>>></i>
	10/case	
PBSIL ₇	#7: 6"- 11"	>>
	10/case	
PBSIL8	#8: 7" - 13"	>>
	5/case	
PBSIL9	#9: 10" - 19"	>>
	5/case	

Retrofit/Electrical Boots

Gray with steel cleats #1: 1/4"- 41/2" EB1 1/8" - 4-1/2", 20/case

Snap-Z Available in Aluminum by request



Touch-up Paint

Approximate match to paint used on panels purchased from GCSM Available in SMP and TRINAR

» 4 oz. brush-top cans

» 4 oz. brush-top cans



PAITUP4S - SMP

PAITUP4T - TRINAR

Spray Paint

Approximate match to paint used on panels and trim purchased from GCSM. Not to be used on panels or trim. Available in SMP and TRINAR

PAITUPS₁₂S-SMP PAITUPS12K - TRINAR



Titebond®

Adhesive/Sealant

- » UV resistant
- » 1% shrinkage to 0°F application
- » Very flexible
- » Fill up to 1" gaps
- » Paintable in 1-2 hours
- » Solvent-Free
- » Bonds to wet surfaces
- » Colors matched to panels

COPSS (Copper Solar Seal) 12/case



Butyl Sealant Tape Our most

economical aeneral





BUTYL-S 32/case - 1/2"

Backer Rods



helps reduce the visible effects of oil canning

BR1/2-CSE BR₅/8-CSE

Snap-Z.032 Aluminum

SPECIAL ORDER

Withstands 110 MPH winds Net free area up to 12 sq. in. per linear foot of


Air-flow: 730 cu. ft. per min. (per 10' ridge) Sold by box of 10/EA

SNAPZ2610011 *12" GulfLok™ Steel Panel* **SNAPZ3210015** *16" GulfLok™ Aluminum Panel* SNAPZ2610015 16" GulfLok™ Steel Panel **SNAPZ3217513** 14" GulfSeam™ Aluminum Panel **SNAPZ2617513** 14" GulfSeam™ Steel Panel **SNAPZ3217515** *16" GulfSeam™ Aluminum Panel* **SNAPZ2617515** 16" GulfSeam™ Steel Panel **SNAPZ3217517** 18" GulfSeam™ Aluminum Panel **SNAPZ2617517** 18" GulfSeam™ Steel Panel **SNAPZ3215015** 16" VersaLoc™ Aluminum Panel **SNAPZ2615015** *16" VersaLoc™ Steel Panel* **SNAPZ3215017** 18" VersaLoc™ Aluminum Panel SNAPZ2615017 18" VersaLoc™ Steel Panel **SNAPZ3220015** *16" MegaLoc™ Aluminum Panel* **SNAPZ2620015** *16" MegaLoc™ Steel Panel* **SNAPZ3220017** 18" MegaLoc™ Aluminum Panel **SNAPZ2205017** 18" MegaLoc™ Steel Panel **SNAPZ2610011** *12" GulfLok™ Steel Panel* **SNAPZ3210015** *16" GulfLok™ Aluminum Panel* **SNAPZ2610015** *16" GulfLok™ Steel Panel* **SNAPZ3217513** 14" GulfSeam™ Aluminum Panel **SNAPZ2617513** 14" GulfSeam™ Steel Panel **SNAPZ3217515** 16" GulfSeam™ Aluminum Panel **SNAPZ2617515** 16" GulfSeam™ Steel Panel **SNAPZ3217517** 18" GulfSeam™ Aluminum Panel **SNAPZ2617517** 18" GulfSeam™ Steel Panel **SNAPZ3215015** *16" VersaLoc™ Aluminum Panel* **SNAPZ2615015** 16" VersaLoc™ Steel Panel **SNAPZ3215017** 18" VersaLoc™ Aluminum Panel SNAPZ2615017 18" VersaLoc™ Steel Panel **SNAPZ3220015** *16" MegaLoc™ Aluminum Panel* **SNAPZ2620015** 16" MegaLoc™ Steel Panel **SNAPZ3220017** 18" MegaLoc™ Aluminum Panel **SNAPZ2205017** 18" MegaLoc[™] Steel Panel


Sold in boxes of 10/ea

RIDGE CAPS PAI___26(K) PAI___24













Application: GulfPBR™




Application: GulfLok™













a: 8 RC16 » a:8 RC16 » a: 9 RC18 » a: 9 RC18

Application: Exposed fastener

















Application: Gulf PBR™


PAIRCDF26 PAIRCDF24


EAVE TRIMS PAI___26(K) PAI___24 PAI___32

























GABLE TRIMS







EF1B Residential Gable Rake



Application: GulfRib™ over battens




Application: 5V Crimp





Application: GulfRib™




















Application: 5V Crimp Use with ED3 or ED1


WALL FLASHINGS

PAI___26(K)
PAI___24
PAI__22

CF1


Counterflashing






Application: All profiles


Add a Kerf Flange or Caulk Edge to any SW or EW






Application: Exposed fastener


EW2




Application: Exposed fastener




Application: 5V Crimp




Application: Standing seam




Application: GulfRib™




Application: 5V Crimp




Application: GulfPBR™



Application: Standing seam



Application: All profiles



Application: All profiles

TRANSITIONS & VALLEYS


PAI___26(K) PAI___24 PAI___32




TF1
Transition Flashing

61/2"
specify roof pitch


Application: Exposed fastener




Application: All profiles




Application: Standing seam




Application: All profiles




Application: All profiles




Application: All profiles



GF1 Application: Exposed fastener GF7 Application: Standing seam




Application: GulfRib™




Application: Standing seam

CORNER TRIMS





Application: GulfRib™





Application: GulfRib™




















PANEL CAPPING TRIMS


PAI___26(K) PAI___24 PAI___32



























BUILDING TRIMS


PAI___26(K)
PAI___24
PAI 32



Application: Metal Building Trim




BKS




Application: Metal Building Trim

BKS OHDJ



Application: Metal Building Trim

BKS *Extended OHDJ*



Application: Metal Building Trim

PAI___26(K) OTHER TRIMS




EC1 Eave Cleat






Panel Starter



LF4 L-flashing custom L-flashing painted side

LF5 L-flashing




LF6

L-flashing

painted side

Z-Flashings



ZF7

ZF9

ZF11

ZF15

» Z-Flashing GulfLok™a: 7/8"

» Z-Flashing GulfSeam™a: 13/4"


» Z-Flashing MegaLoc™ a: 2"

» Z-Flashing VersaLoc™ a: 11/2"

» Z-Flashing GulfSnap™a: 11/2" **ZF**15


6"

GC7






GLULCLIP




Application: GulfLok™

PC1



Other Gable Cleats



- GulfSeam™ a: 33/4" b:13/4"
- » MegaLoc™ a: 4" b: 2"
- » VersaLoc™ a: 3 1/2" b: 1 1/2"

GC9

GC11

GC15



Visit our new online ordering platform store.gulfcoastsupply.com



Convenience

Place your order from your office or job site 24/7.



Streamlined

User-friendly to ensure a seamless and hassle-free experience.



Efficiency

Eliminate potential communication errors and minimise the risk of order inaccuracies.



Support

Our dedicated customer service team is readily available to address any questions.

Click. Click. Ordered.

PRODUCT WARRANTIES

Guardian Guarantee

50yr PVDF Painted Steel

1x transferable

50 yr

Coating; Chip, Peel, Cracking

35 yr

Fading, Chalking

50 yr

Substrate

*Salt and Brackish water setbacks: 1,500' from breaking surf / coastline 800' from large ay / inlet / canals 400' from marsh / tributary

50yr SMP Painted Steel

1x transferable

50 yr

Coating: Peel, Flaking or Loss of Adhesion

30 yr

Fading, Chalking

50 yr

Substrate

*Salt and Brackish water setbacks: 1,500' from breaking surf / coastline 800' from large ay / inlet / canals 400' from marsh / tributary 45yr Steel Mill Finish Substrate

45 yr

Corrosion

*Salt and Brackish water setbacks:

800' from large ay / inlet / canals

400' from marsh / tributary

1,500' from breaking surf / coastline

Ocean Guard™

50yr Saltwater PVDF Paint Aluminium 1x transferable

50 yr

Coating; Flaking, Loss of Adhesion

35 yr

Fading, Chalking

20 yr

Substrate

*No setback from salt / brackish water